

# Soil Compaction

33


## Laboratory Compaction

Equipment for Max/Min Dry Density Test : AS1289.5.5.1



Max/Min Vibrating Table with Amplitude Variation Controller  
**33-T0063/1.CON**

### Accessories

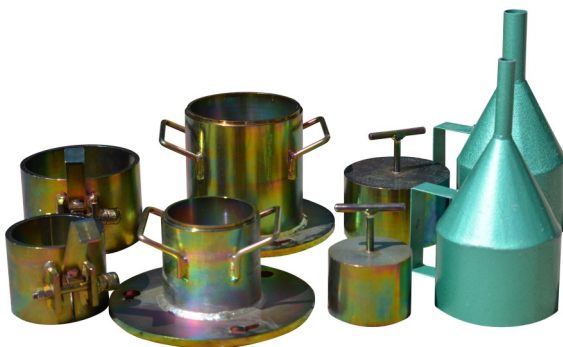

3l Max/Min Mould, complete with Collar & Surcharge  
**33-T0063/3.CON**

1l Max/Min Mould, complete with Collar & Surcharge  
**33-T0063/2.CON**

Max/Min Funnel 13mm  
**33-T0063/4A.LOC**


Max/Min Funnel 25mm  
**33-T0063/4B.LOC**



Extension Frame  
**33-T0063/1B.CON**



Max/Min Vibrating Table shown fixed to Extension Frame for 'stand alone' operation

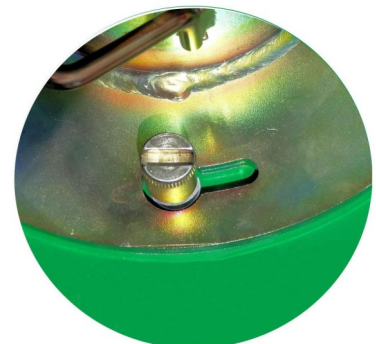

Quick coupling and release system for mounting the Moulds on to the Table



53 Granite Street, GEEBUNG, QLD, 4034, Australia | P.O. Box 124, VIRGINIA, QLD 4014, Australia

Ph.: +61 (0)7 3265 4952 | Fax: +61 (0)7 3265 2713 | Email: sales@geo-con.com.au | Web: www.geo-con.com.au