


GEO-CON SLIDE BAR/ANVIL/ROD CONNECTION SYSTEM

NOTE: The Geo-Con system has been design to virtually eliminate the normally problematical methods used to join the Slide Bar to the Rods.

The Geo-Con DCP Hammer should NOT be used in the “back hammer” mode to extract rods from the ground. The specifically designed Extractor is made to easily extract rods without bedding if used properly.

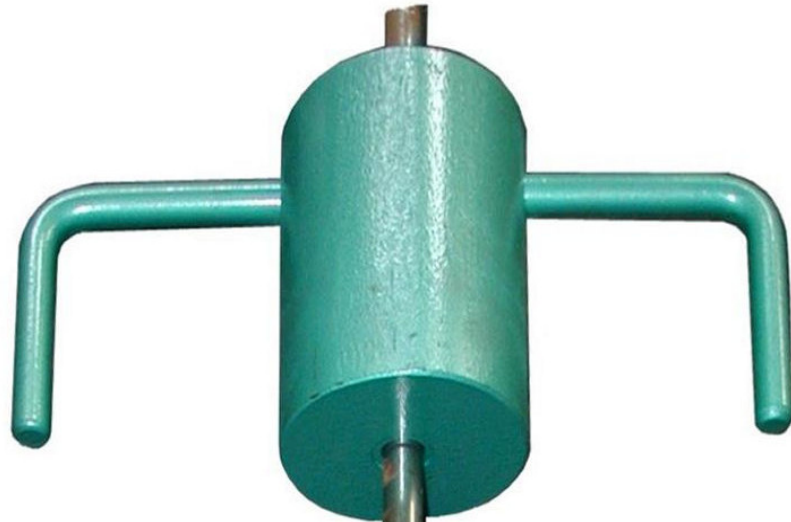

TO REMOVE & REPLACE DAMAGED SHEAR PINS

1. Undo all 8 Screws holding the Shear Pins in place
2. Push the Shear Pins out of the holes (this may require some force if they have been displaced)
3. Take out Slide Bar and clean all components.
4. Place Slide Bar back in its correct position and insert new Shear Pins
5. Screw in screws to hold the Shear pins in place.

