

Servo-Pneumatic Four Point Bend Apparatus

Accessories

ADVANCED PAVEMENTS TESTING SYSTEMS



The Servo-Pneumatic Four Point Bend Apparatus comprises of a pneumatically powered loading system, a beam cradle, an optional environmental chamber, IMACS Integrated Multi-Axis Control System and UTS test application software.

The beam cradle has been designed to subject an asphalt beam specimen to four point bending with backlash free rotation and horizontal translation of all load and reaction points.

Features

- Digital servo-controlled pneumatic actuator provides accurate control of loading waveshape
- Innovative “floating straight-edge” on-specimen transducer eliminates errors due to frame compliance
- Backlash free rotation and translation on all load and reaction points
- Sinusoidal or haversine controlled strain or controlled stress loading
- Constant force motorized specimen clamping
- Non-linear regression data fitting ensures reliable determination of phase and modulus.

Specifications

Test Standards

AASHTO T321 – Fatigue (Formerly TP8)
 AG:PT/T274-15 – Fatigue (Formerly AG:PT/T233, AST 03:2000)
 ASTM D7460 – Flexural Fatigue
 EN1269724D – Resistance to Fatigue
 EN 12697-26B – Stiffness

Specimen Dimensions

Loading Frequency	up to 60 Hz*
Load Capacity	up to 5kN dynamic
Specimen Size	70 max. x 80 max. x 380 min. mm (HxWxL)
Yoke Alignment Tool	50x50x355.5mm (HxWxOuter span centers) 70x70x420mm (HxWxOuter span centers)
Air Supply	Clean, dry air at 800 – 900kPa
Minimum Flow Rate	5 liter/sec

*Load limitations apply at higher frequencies

Dimensions and Weight

Apparatus	600x230x490 - 560mm (HxDxW)/35kg
IMACS	270x360x450mm (HxDxW)/ 11kg
Air Accumulator	330x470x450mm (HxDxW)/9.5kg

Control & Data Acquisition, see IMACS specifications

Ordering information

PV74A02 – Four Point Bend Apparatus - Pneumatic
 PV70406 – Yoke Alignment Tool for 420mm
 (Outer span centers) x 70mm x 70mm
 PV70403 – 4PB PVC beam (dummy specimen)
 PV70116 – Temperature measurement kit
 PV70404 – 4PB Apparatus reference beam assembly
 PV70405 – 4PB Aluminium channelled reference beam
 PV70E02 – Env Chamber (-25°C / +60°C)

Additional accessories may be required to create a working testing system.

Please contact us for advice.

Testing Made Easy

The specimen is laterally positioned by eye using etched lines as a visual guides.


Vertical clamping of the specimen is achieved by servo-motor driven ball screws which are operated continuously during the test to adjust for the compliance of the specimen at the clamping surfaces.

The pneumatic four point bend apparatus uses a bottom loading actuator with high performance servo-valve, PID closed-loop control and run time adaptive control algorithm that adjusts the command signal during the test. The control system uses load and strain feedback signals.

IPC Global's UTS test and control software is known for its simplicity in use, clarity of results and analytical power.

Developed from expert knowledge of applications, it features real-time graphs for monitoring the specimen under test; portable binary data files for sharing, reviewing & analysis; and 'live' transducer levels display.

Optional non-linear regression data fitting ensures reliable determination of phase and modulus.

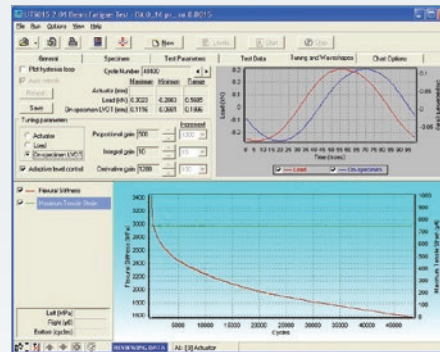

Complies with the following standards: EN12697-24 Annex D*, EN12697-26 Annex B*, AASHTO T321 (formerly TP8), ASTM D7460, AG:PT/T233 (formerly AST 03:2000)

► IPC Global Customer Care

At IPC Global we are proud of our products.

We are dedicated to supplying high quality, accurate, affordable, easy-to-use systems for Advanced Testing of asphalt, binders and other pavement materials. As a valued customer of IPC Global you will receive continuous, expert support and advice for your instrument. Furthermore, we offer full installation and training in the correct operation of your IPC Global equipment. For support from our expert Customer Care Team, contact your local IPC Global-Controls office/distributor or email ipcglobalsupport@controls-group.com.

Visit our website for more information www.controls-group.com/ipcglobal.



► Contact Us

www.controls-group.com/ipcglobal

IPC Global

T +613 9800 2200 F +613 9800 2813 E ipcglobalsales@controls-group.com www.controls-group.com/ipcglobal

Controls Group

T +39 02 92184 1
F +39 02 92103 333
E sales@controls-group.com
www.controls-group.com

France

www.controls.fr

Iraq

www.controlsmiddleeast.com

Poland

www.controls.pl

Spain

www.controls.es

Italy

www.controlsitalia.it

Mexico

www.controls.com.mx

UK

www.controlstesting.co.uk

USA

www.controls-usa.com