


Geotechnical: Consolidation

26

Soil Shrinkage Index Shrink / Swell Apparatus

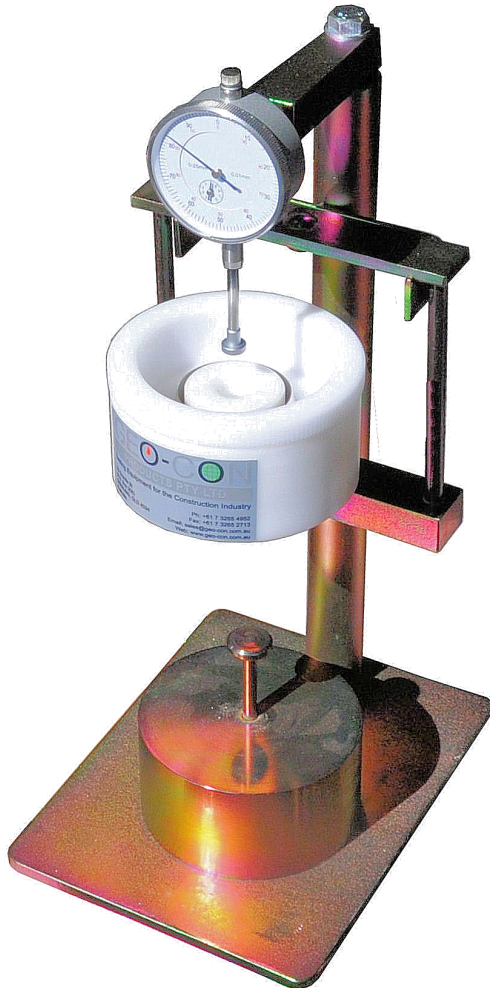

Single Shrink/Swell set-up



Consolidation Cell, Porous Plate, Cutting Ring & Pressure Spacer

DESCRIPTION

This apparatus is used to measure the shrink/swell index of soils in accordance with AS1289.7.1.1. The apparatus consists of a consolidation cell, stainless steel cutting ring, two porous plates, loading device, cradle, surcharge and a dial indicator.

The consolidation cell is assembled together with the soil sample within the cutting ring and the upper and lower porous plates. The assembly is placed in the loading device and the initial 5kPa seating pressure is applied by moving the cradle from the holder onto the cell. The specimen is then loaded to 25kPa by placing the surcharge into position on the cradle. The cell is then filled with water. The dial indicator measures the changes in the thickness of the soil specimen.

APPARATUS & FEATURES

- Plated Loading Device
- Dial Indicator (calibration requirement to be specified)
- Extra strength lightweight polycarbonate Consolidation Cell
- Stainless Steel Cutting Ring
- Sintered Bronze Porous Plates
- Plated Cradle and Surcharge



3-Gang Set-up made for wall mount or bench top use

