


BALL PENETRATION TEST (Embedment Allowance for Spray Sealing)

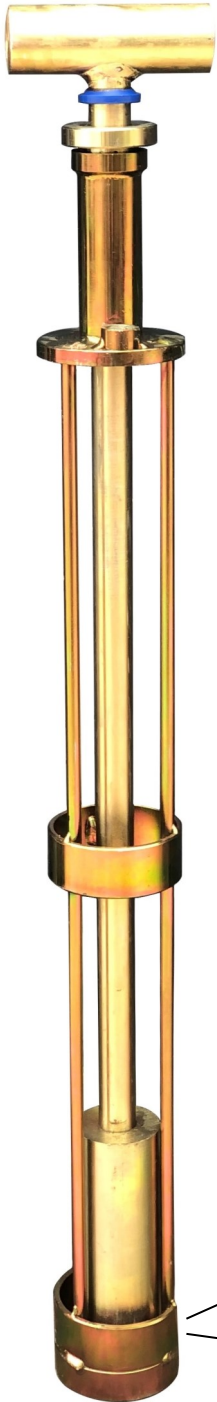


FEATURES

- Robust and lightweight (7kgs)
- Supplied with built in levelling “bullseye” bubble.
- Easy set up and “quick” read of penetration from cursor.
- Optional extra of a more accurate reading by use of digital dial gauge.
- Interchangeable “ball”


SPECIFICATIONS

The Hammer has been made to suit the AUSTRROADS Test Method SDT 04, i.e.: -

- Drop of 457mm +/- 1mm,
- Hammer mass 4.53kg +/- 0.02kg,
- 19mm diameter ball.

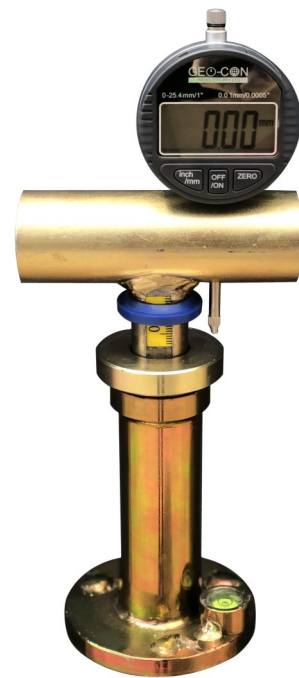

Digital Dial Gauge in use

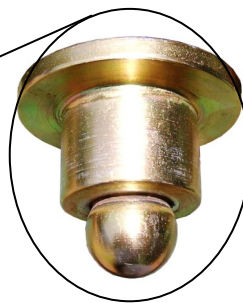

19mm Ball (interchangeable)

